


CABLE ASSEMBLY DATASHEET

3506 SERIES, FLEXIBLE CABLE,
GH(MALE)- 1.85MM(MALE)

GAM8U2- TGJ8SCHEMNI185M-XXX

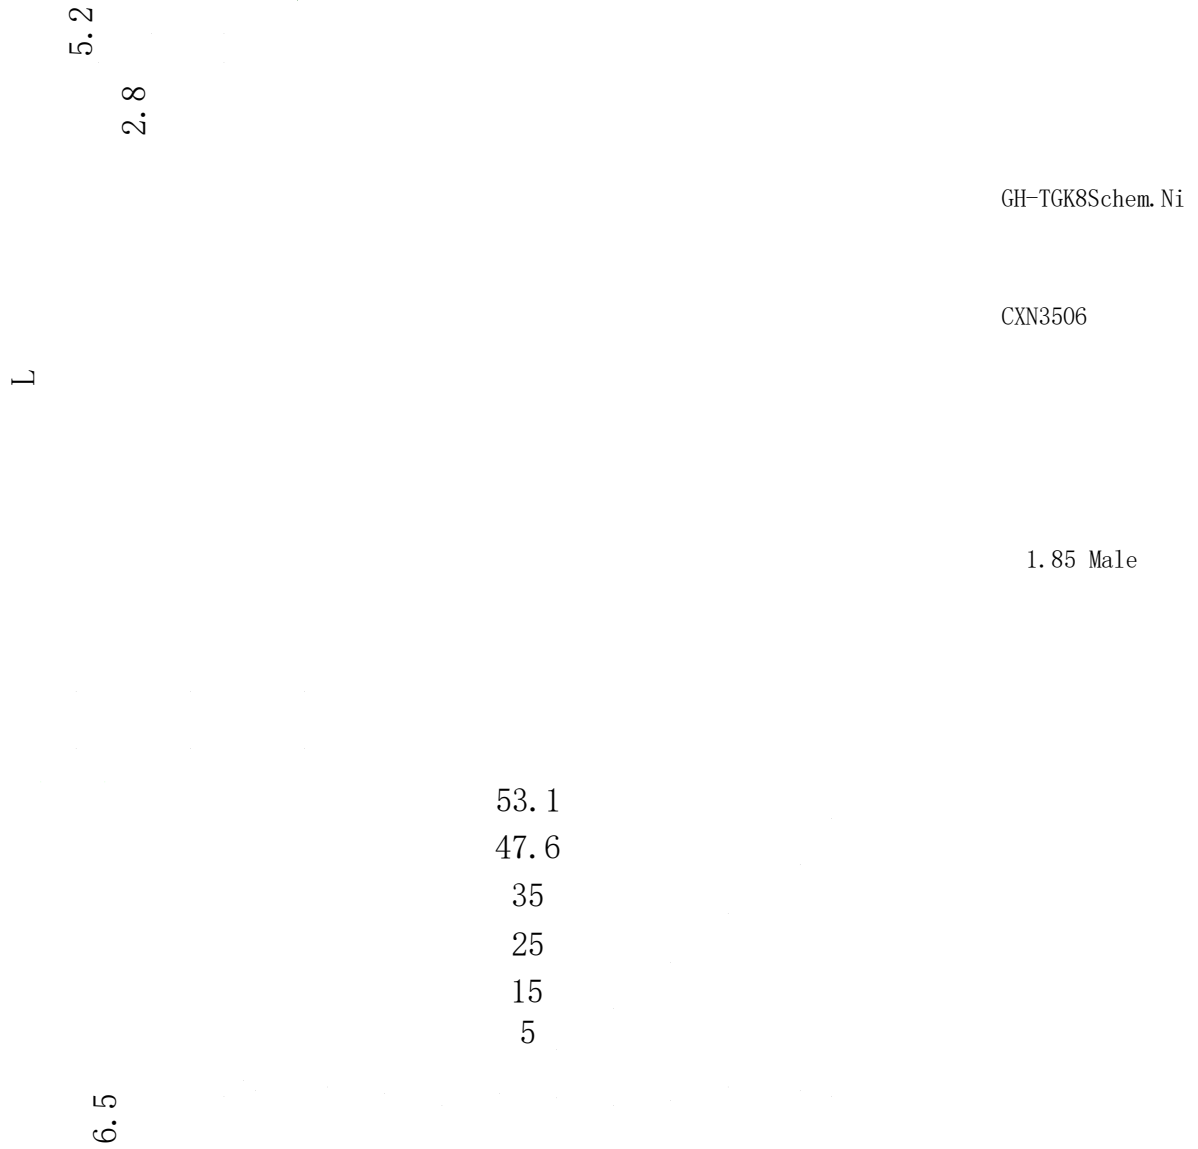

* Label and Shrinking tube design depend on customer's request.

Configuration

| | |
|-------------------------------|------------------------------------|
| Connector 1 Type | GH-ZGJ8Schem.Ni |
| Connector 1 Body Style | Straight |
| Body Material and Plating | Chemical nickel |
| Connector 1 Mount Method | Straight |
| Connector 1 Docking End Model | GH-ZWGJ8Schem.Ni & GH-ZGJ8Schem.Ni |
| Connector 2 Type | 1.85mm Male |
| Connector 2 Body Style | Straight |
| Body Material and Plating | Stainless Steel |
| Connector 2 Mount Method | None |
| Cable Type | 3506 Series |

Electrical Specifications

| | |
|-------------------------|------------------------------------|
| Impedance | 50 Ω |
| Frequency | DC to 65GHz |
| Return Loss/VSWR | 12dB to 65GHz |
| Shielding Effectiveness | <-100dB @ 1GHz |
| Power Handling | 90watt @ 4GHz at sea level,VSWR1.0 |

Environmental Data

| | |
|-------------------|----------------|
| Temperature Range | -55°C to +85°C |
| 2002/95/EC(RoHS) | Compliant |

Cable Specifications

| | |
|----------------------------|----------------------|
| Center Conductor | Silver plated copper |
| Dielectric | e PTFE |
| Jacket | FEP |
| Capacitance(pF/m) | 94 |
| Velocity of propagation(%) | 82 |
| Min. bending radius(mm) | 6 |
| Jacket Diameter(mm) | 2.2 |

Part Number List

CABLE ASSEMBLY DATASHEET

3506 SERIES, FLEXIBLE CABLE,
GH(MALE)- 1.85MM(MALE)

GAM8U2- TGJ8SCHEMNI185M-XXX

| Part Number | Length [mm] | Insertion Loss ≤(dB) | | | |
|-----------------------------|-------------|----------------------|-------|-------|-------|
| | | 5GHz | 10GHz | 20GHz | 40GHz |
| GAM8U2-TGJ8SchemNi185M-1000 | 1000±10 | 1.7 | 2.5 | 3.62 | 5.32 |
| GAM8U2-TGJ8SchemNi185M-800 | 800±8 | 1.4 | 2.06 | 3.04 | 4.42 |
| GAM8U2-TGJ8SchemNi185M-500 | 500±5 | 0.95 | 1.38 | 2.05 | 2.98 |
| GAM8U2-TGJ8SchemNi185M-300 | 300±5 | 0.65 | 0.96 | 1.39 | 2.06 |
| GAM8U2-TGJ8SchemNi185M-260 | 260±5 | 0.59 | 0.87 | 1.25 | 1.92 |
| GAM8U2-TGJ8SchemNi185M-200 | 200±5 | 0.51 | 0.74 | 1.12 | 1.54 |
| GAM8U2-TGJ8SchemNi185M-100 | 100±5 | 0.35 | 0.52 | 0.73 | 1.12 |

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve products, we reserve the right to make changes judged to be necessary.